


# SLR-608 Loader/unloader

## for AOI/DI Processes

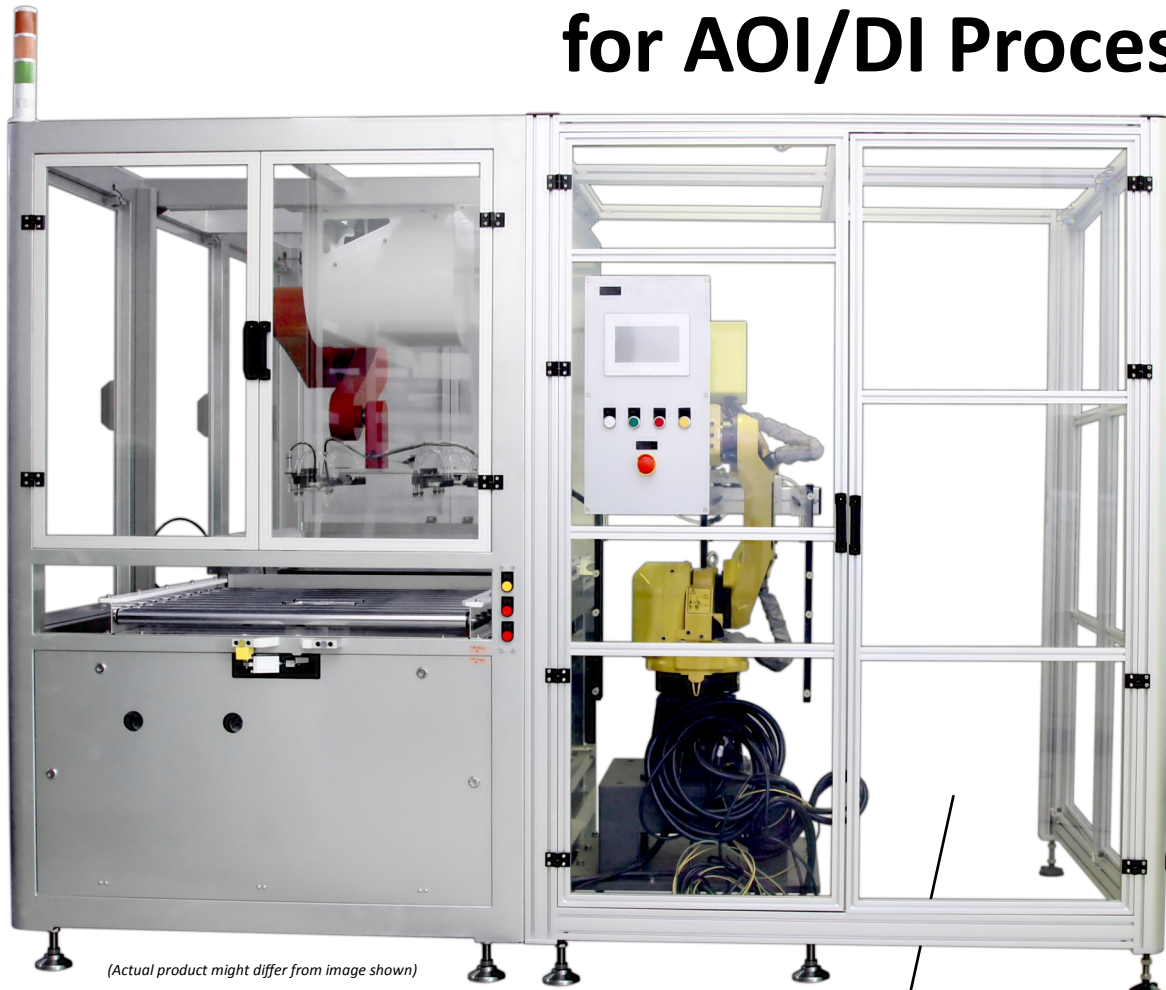

*(Actual product might differ from image shown)*


PCB  
Automation  
Developed  
by Symtek

## DESCRIPTION

- 1 Frame-mounted arms allow for faster installation.
- 2 3-axis and 6-axis robots work in pairs to load, flip the panels and unload for 2-sided processing.
- 3 High-reliability FANUC 6-axis robot.
- 4 Award-winning 3-axis robot designed by SAA.
- 5 The machine can manage panels with interleaf.

### SUITABLE FOR

Handling panels for any AOI / DI processes that need panel flipping.

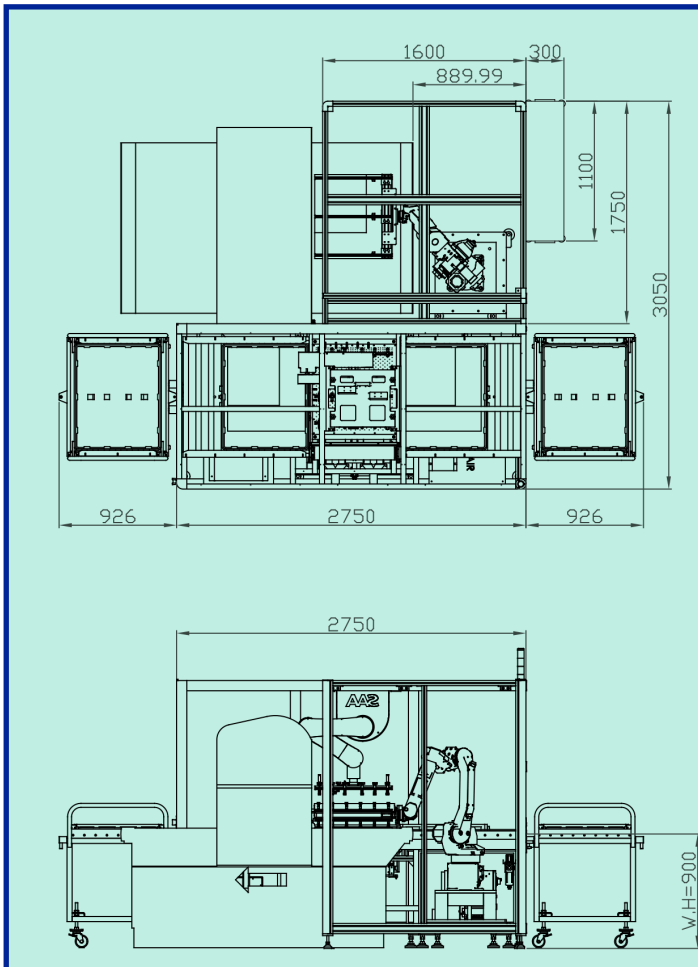

| TYPE SLR-608       | Loader/Unloader      |
|--------------------|----------------------|
| DIMENSIONS (LxWXH) | 2750x3050x2100 mm    |
| WORKING HEIGHT     | 900 mm ± 50mm        |
| MAX. PANEL SIZE    | 24x24 in.            |
| MIN. PANEL SIZE    | 12x12 in.            |
| PANEL THICKNESS    | 0.075 ~ 1.6 mm       |
| POWER              | 1PH 220V 50/60Hz 6KW |
| AIR                | 0.6 MPa 20 NL/min    |
| THROUGHPUT         | 3 panel sides/min    |

